

# ROUND CO-AXIAL METAL CEILING Loudspeakers



- > **RCS6/TCOAX**
- > **RCS6/FTSCOAX**

## TECHNICAL SPECIFICATIONS

Rated power, Watts	10
Tappings 100 volt line, Watts	10/5/2.5/1.25
Transformer Impedance, Ohms, 100V	1k/2k/4k/8k
Tappings 70.7 volt line, Watts	5/2.5/1.25/0.625
Driver impedance, Ohms	8
Effective frequency range, Hz (BSEN60268-5)	RCS6/TCOAX: 65-20KHz RCS6/FTSCOAX: 95-20KHz
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10kHz	RCS6/TCOAX: 91 RCS6/FTSCOAX: 92
S.P.L. @ Full power Octave Bandwidth, dB	RCS6/TCOAX: 101 RCS6/FTSCOAX: 102
Acoustic Power (dB-PWL@1 watt) 1k/2kHz, dB	RCS6/TCOAX: 88/89 RCS6/FTSCOAX: 89/88
Dispersion at 1k/2k Hz, Degrees	RCS6/TCOAX: 180/180 RCS6/FTSCOAX: 180/180
Directivity Axial Q factor, 1k/2kHz	RCS6/TCOAX: 2.2/4.3 RCS6/FTSCOAX: 2.3/4.2
Dimensions, diameter, mm	Ø239
Net weight, Kgs	RCS6/TCOAX: 1.4 RCS6/FTSCOAX: 2.0
Colour/Finish	White RAL9016
Material	Steel
Mounting	Torsion springs
Cut-out, mm	RCS6/TCOAX : Ø190 RCS6/FTSCOAX : Ø200


- > RCS6/FTSCOAX is BS5839 Part 8 voice alarm compliant

EASE, CATT, ULYSSES and Architectural specifications are supplied on the disc inserted at the back of this folder  
 Manufacturer reserves the right to alter specifications without notice – March 2007


# RCS6/TCOAX    RCS6/FTSCOAX

## ROUND CO-AXIAL METAL CEILING LOUSPEAKERS


▼ **RCS6/TCOAX**  
side view  
unit: **mm**

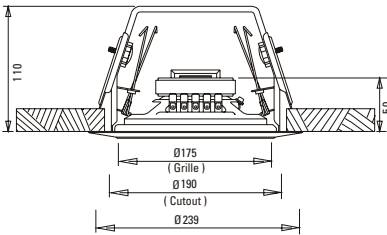

▼ **RCS6/FTSCOAX**  
side view  
(gland not supplied)  
unit: **mm**

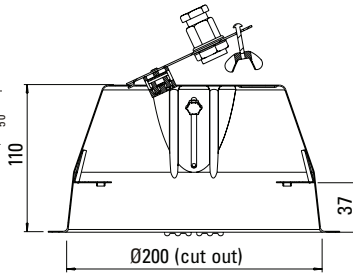


▼ **circuit diagram**  
**RCS6/FTSCOAX**



CE

### speech octave band sensitivity

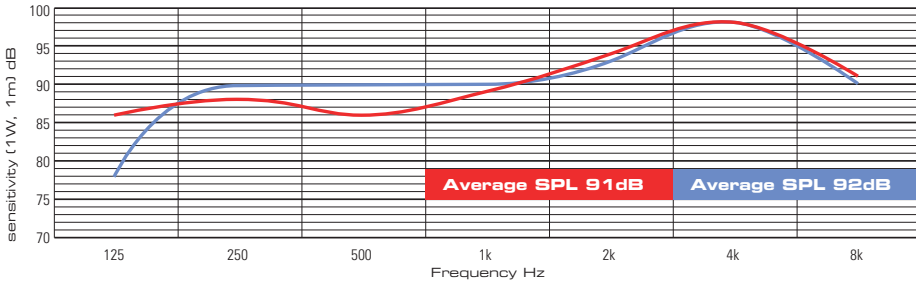

Effective Frequency Range

● **RCS6/TCOAX** 65Hz - 20KHz  
● **RCS6/FTSCOAX** 95Hz - 20KHz



**Penton UK Ltd**

Unit 2 Teville Industrials | Dominion Way | Worthing | West Sussex | BN14 8NW

T: +44 (0)1903 215315 | F: +44(0)1903 215415 | E: SALES@PENTONUK.CO.UK

[www.penton.org](http://www.penton.org)