




METAL SOUND PROJECTORS BI-DIRECTIONAL


CELL10/BDT

CELL10/BDTC


Installation instructions

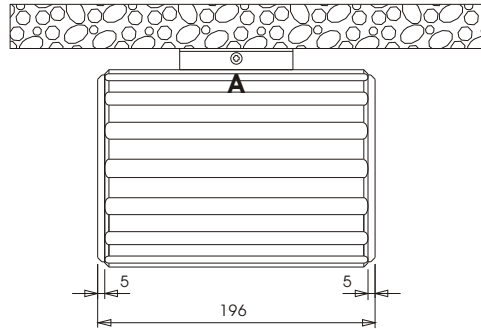

Side View

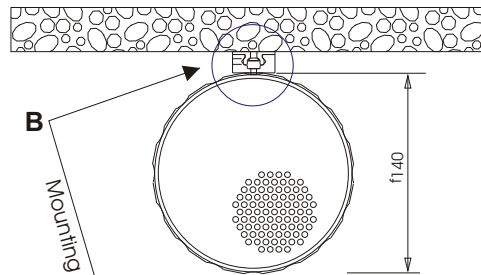

Front View

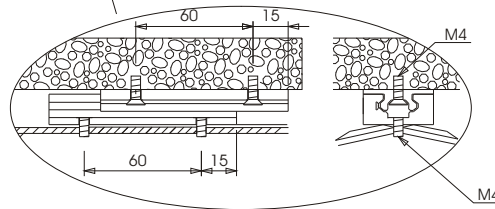


1. Remove the sliding bracket from the unit by using an Allen Key inserted into position "B" as shown on the above drawing.

2. Place the part of the bracket that you have just removed into the required mounting position and mark fixing holes and then fix (bracket only)

3. Select from the 5 core cable (position "A" on the drawing) the tapping required i.e. Example, Black wire = common and Red wire = maximum power.

CELL10/BDT

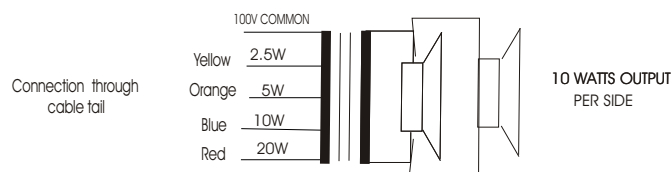


Installation instructions con/td

CELL10/BDT & CELL10/BDTC

For the CELL10/BDTC the colour connections are as follows:

Important note:-

High Temperature cable
Tail can be fitted by
Penton on request

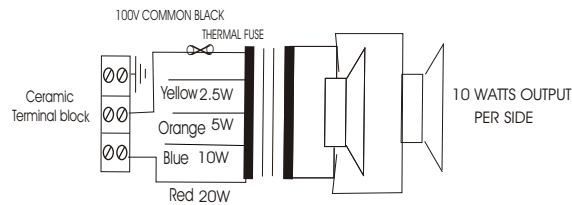

Please ensure that the cable is connected to the correct terminals in your selected junction box and that no other connections from the loudspeakers are made. The unused transformer tapping must always be isolated from one another to avoid a short circuit.

4. The loudspeaker is now in the position to be mounted onto the pre-mounted bracket previously fitted to your chosen position.

5. Before putting 100 volt line through the units it is advisable to check the impedance of the circuit

6. On checking the line impedance the speaker is in an operational mode.