







ROUND METAL CEILING LOUDSPEAKERS

RCS4/T RCS4/FTS

Installation instructions

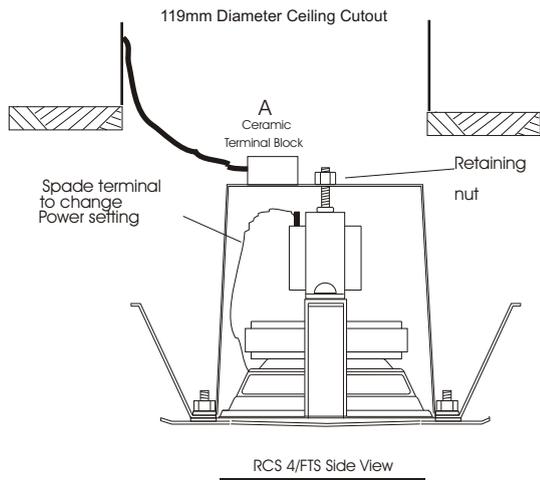


1. Terminate to the ceramic terminal block as shown on the drawing. "A"
The loudspeaker will be factory set at half power 2 watts. If you require higher or lower output remove the retaining nut and fire dome to locate the 100 volt line transformer. To change the power move spade terminal on the transformer to required wattage.
See circuit diagram below:

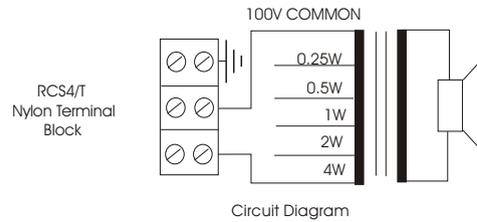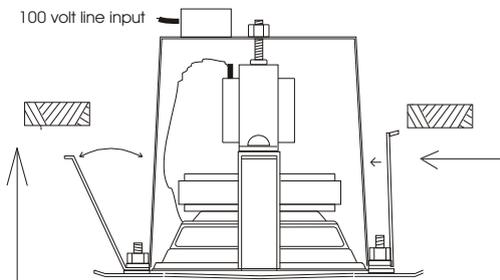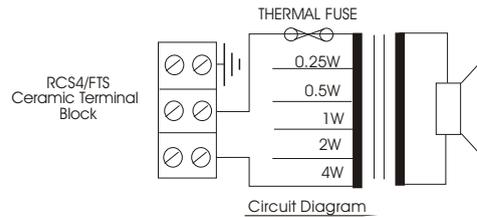

2/ To locate the speaker into the ceiling push the spring arms in towards the fire dome and push the speaker up through the pre-cut hole.

4/ To install the RCS4/T follow the same procedure as Described for the RCS4/FTS (loudspeaker with fire dome). Items 1,2,3 Terminate to the nylon terminal block As shown on the drawing below

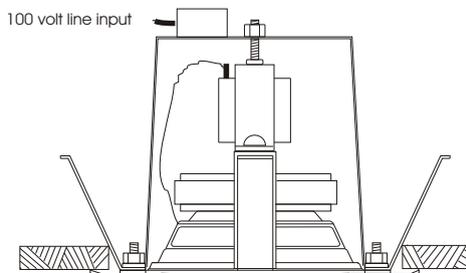

3/ Speaker installed in correct position

