




VANDALPROOF METAL CABINET LOUDSPEAKER


SENTRY4/STC

Installation instructions


Front View



Top View

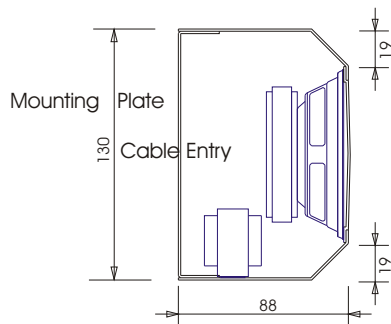

Side View



Circuit Diagram

1. You can cable this unit either via the cable entry in the center of the mounting plate or by the 2 x 20mm cable entries to be found at the top of the same plate. See above drawing.
2. Take the mounting plate from the loudspeaker by removing the 4 x M4 x 12 cross head screws.
3. Secure the back plate to a flat surface using the fixing holes provided.
4. Once the cable has entered the unit terminate the 100 volt line supply via the ceramic terminal block provided to your required volume as shown on the circuit diagram.
5. Reverse the process requested in item 2 and slide the loudspeaker cabinet over the mounting plate and replace the 4 screws previously removed.