






PCL 5/T ROUND PLASTIC CEILING LOUDSPEAKER



Technical Specifications

Rated power, Watts	6
Transformer tapings 100 volt line, Watts	6/ 3/ 1.5/ 0.75/ 0.25
Transformer Impedance , Ohms	1.67k/ 3.33k/ 6.66k/ 13.3k/ 39.9k
70.7 volt line, Watts	3/ 1.5/ 0.75/ 0.375/ 0.125
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	100 - 17,500
S.P.L. ,@ 1m, 1watt, dB	92
S.P.L. ,@Full power/ 1m, dB	100
Dispersion at 1,000 Hz, Degrees	180
Directivity Q factor, 1k Hz	2.3
Dimensions front and depth, mm	203 x 80
Net weight, Kgs	1.0
Colour / Finish	White
Material	Plastic Baffle,Metal Driver Chassis,Metal Grille
Mounting	Quick Screw-On Installation with Clips

CE

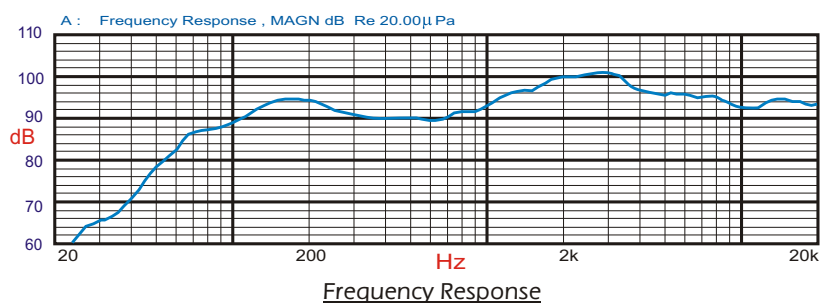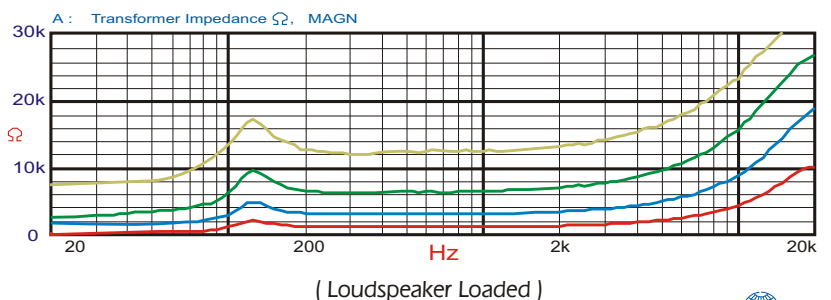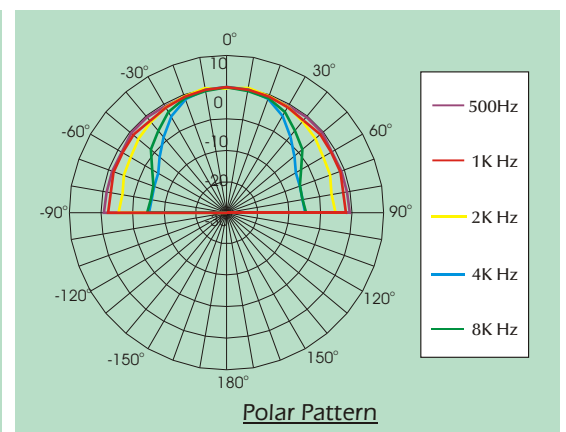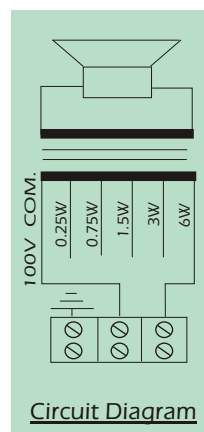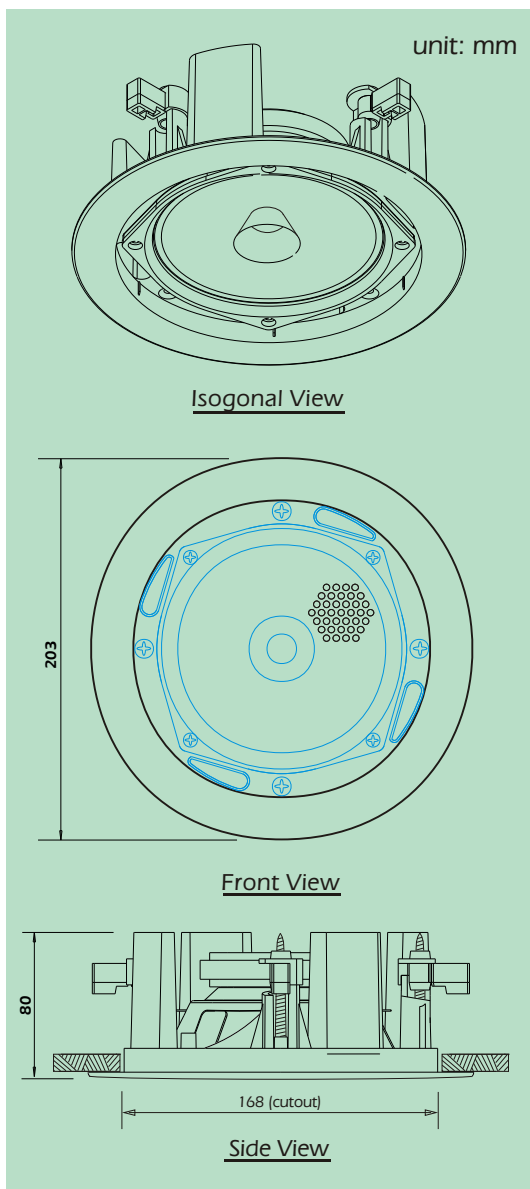

Technical Specifications

Rated power, Watts	6
Transformer tapings 100 volt line, Watts	6/ 3/ 1.5/ 0.75/ 0.25
Transformer Impedance , Ohms	1.67k/ 3.33k/ 6.66k/ 13.3k/ 39.9k
70.7 volt line, Watts	3/ 1.5/ 0.75/ 0.375/ 0.125
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	85 - 18,500
S.P.L. ,@ 1m, 1watt, dB	92
S.P.L. ,@Full power/ 1m, dB	100
Dispersion at 1,000 Hz, Degrees	160
Directivity Q factor, 1k Hz	2.1
Dimensions front and depth, mm	234 x 80
Net weight, Kgs	1.10
Colour / Finish	White
Material	Plastic Baffle,Metal Driver Chassis,Metal Grille
Mounting	Quick Screw-On Installation with Clips

CE

